



*For modern
apartments*

MURPHY CABRANETTE KITCHENS

The permanent beauty of porcelain on steel.
Soap and water remove every trace of dirt.
Colors never fade; never need refinishing.

Nothing to shrink, swell or warp. Doors close
quietly; drawers slide easily . . . always. All
units perfectly matched in design and color.



Illustration shows a Murphy Cabranette Kitchen fitted
with the all-steel Murphy Counter-balanced blind . . .
convenient concealment in the modern manner. For
complete information ask for Bulletin No. 3138.



Manufactured by Dwyer Products Corporation, Michigan City, Indiana

MURPHY CABRANETTE

Kitchen No. 39—Assembly No. 1

For a breakfast for two—an occasional chop in the evening—ice cubes and a cold bottle for the evening callers, the No. 39 MURPHY CABRANETTE is ideal. This little compact kitchen, occupying only a little over six square feet of floor space, may be hidden away in a small alcove.

Stock Colors: White or ivory with black trim. Other color combinations on special order.

Refrigerator: Porcelain front and porcelain lined. Gross content, 4.22 cu. ft. Shelf area, 7.42 sq. ft. Two ice trays contain $4\frac{1}{2}$ pounds of ice in 42 cubes. Electric lighted interior operating automatically as door is opened. Hardware in non-tarnishing chrome. (May be had without refrigerating unit if desired.)

Undersink Cabinet: The lower section (covered by grille) houses the MURPHY CABRANETTE electric refrigerating unit. An ingenious method of baffling insures complete air circulation through the grille. The door above provides access to the storage space under the sink bowl.

Sink: Porcelain on cast iron from our own patterns. $27'' \times 23''$ with $6''$ hollow back to accommodate piping. $12\frac{1}{4}'' \times 19''$ bowl. $7\frac{1}{2}''$ deep with $3\frac{1}{2}''$ drain outlet to receive basket type strainer.

Electric Range: Two burner electric plate as illustrated. Front burner 2000 watt, rear burner 1000 watt. Open burners are standard, but "Chromalox" closed burners are available for either or both at additional cost.


Gas Range: Two burner gas plate is also available in exactly the same dimensions as electric plate. Cooking top in black porcelain on steel with depressed bowls encircling modern round cast iron burners. Individual cast iron grates finished in black porcelain. This style of range is not arranged for automatic lighting.

Backsplasher: Heavy flat steel, finished in porcelain to match cabinets. Drilled for screwing directly to building wall.

Wall Case: Contents, 5.4 cu. ft. Shelf area, 9.3 sq. ft. Standard equipment includes 6 spice jars in rattle proof racks mounted on inside of doors, also wood cutting board on slides attached to shelf. Back of wall case is hollow to accommodate $1'' \times 4''$ wood bucks attached to building wall. Wall case screws to these bucks through back panel.

See detail for space requirement when kitchen is to be built between walls. Detailed roughing-in drawings will be supplied on request.

Sinks are made with right or left drainboard in order that exact reverse of arrangement illustrated is available when kitchens are installed back to back.

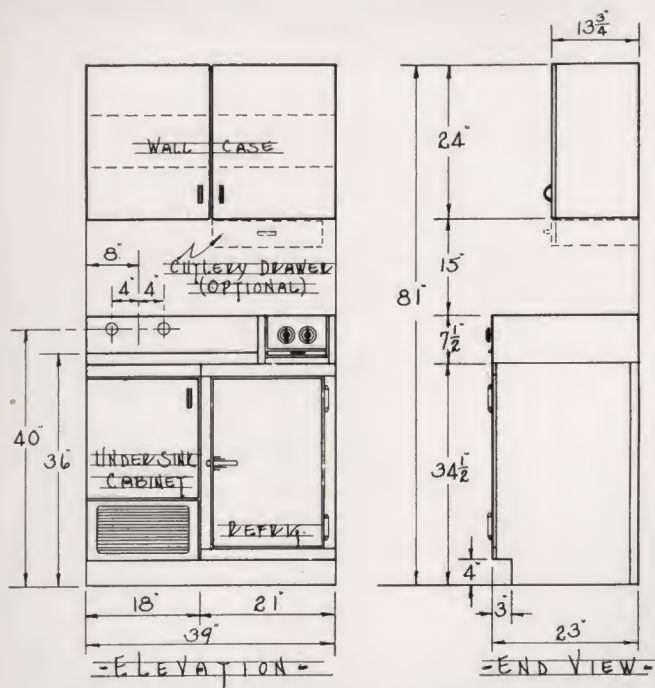

**Every MURPHY CABRANETTE
is Built of Steel—With Entire
Front in Vitreous Porcelain**

MURPHY CABRANETTE

Kitchen No. 480 (and No. 480-A)

The No. 480 is more REAL kitchen . . . more actual capacity . . . greater kitchen convenience . . . than has ever been offered in a width of only 48". Location and size of the oven and broiler, for instance . . . you find these units right where you find them in the finest domestic range . . . down where the roaster or broiling pan can be removed without danger of spilling hot grease on the user . . . and the oven accommodates a real roaster. An abundance of storage space . . . the upper storage cabinet extends the full width of the kitchen.

The No. 480 and No. 480-A are identical except for the height of the wall case (upper storage cabinet). It is 24" high in the No. 480 and 30" high in the No. 480-A.

EASY TO HANDLE—EASY TO INSTALL

Shipped in three sections to facilitate handling—the base section—upper storage cabinet with splashers—and the sink. Installation of the base section is merely a matter of setting it in position. It is shipped with refrigerating unit installed and connected. Equipped for either gas or electric cooking, top burners and oven are cross connected so that only one service connection is necessary. The upper storage cabinet, as well as back and end splashers, screw directly to the recess walls.

Refrigerator: Full porcelain interior, automatically lighted. Automatic temperature control adjustable to ten freezing speeds. Gross contents 4.22 cu. ft. Shelf area, 7.42 sq. ft. Two ice trays contain 4½ lbs. ice in 42 cubes.


Gas Range: Four burner cooking top in black porcelain with automatic lighting. Oven and broiler are fully insulated and porcelain lined. Oven is 12" wide, 18½" deep, and 8½" high. Separate broiler compartment is same width and depth and 4" high. Oven temperature control is accessory equipment on gas range, separately priced.

Electric Range: Three burner cooking top in porcelain to match kitchen. Burners are 2,000 watt, 1,200 watt, and 1,000 watt. Open burners are standard, but "Chromalox" closed burners available at extra cost. Oven and broiler dimensions are the same as on gas range. Input to oven and broiler burner, 2,750 watts, making total connected load 6,950 watts. Top burner switches are three heat load balancing type. Two-pole toggle switch on oven burner. Oven temperature control is standard equipment on electric range.

Wall Case: 48" long. 24" high in the No. 480 and 30" high in the No. 480-A. Both have two adjustable shelves with shelf area of 12 sq. ft. Cu. contents in No. 480, 8 cu. ft. in No. 480-A, 10 cu. ft. Regularly equipped with spice jars, wood cutting board and removable cutlery drawer.

Note: Available only as illustrated, with refrigerator on right, oven at left. Service connections are made in the space under the sink bowl, in the approximate center of the assembly.

Ask for bulletin No. 3138 which more completely describes this kitchen, also illustrates the MURPHY CABRANETTE COUNTERBALANCED BLIND—the ultimate in a screen for the kitchen which must face directly into the living quarters.

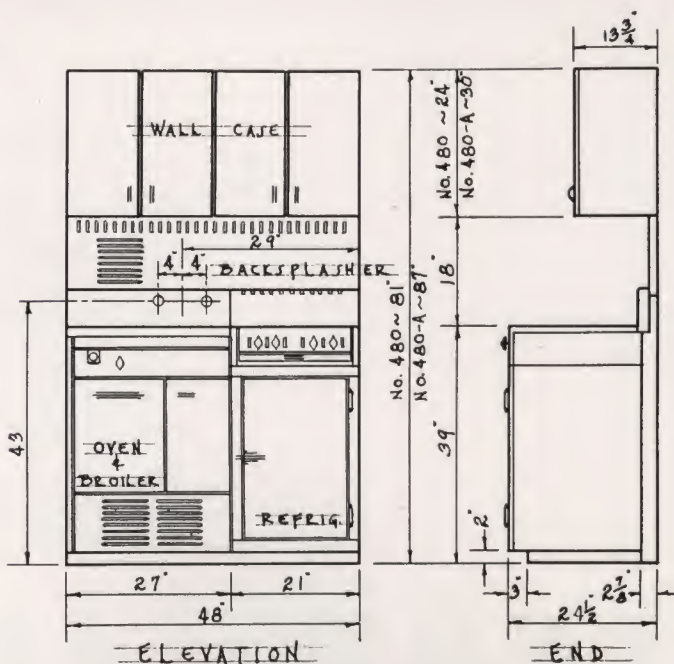



TYPE HR Murphy Cabranette Refrigerator

MURPHY CABRANETTE

Refrigerators with Electric Refrigerating Units

Murphy Cabranette refrigerators with electric refrigerating units are thoroughly modern — adequately insulated — full porcelain interior and porcelain front — electric lighted interior automatically operated by the door — automatic temperature control adjustable to ten freezing speeds — trigger action door lock in chrome with hinges to match.

Designed for Installation Between Cabinets


A feature of outstanding importance is the design which permits of installation tightly between other cabinets or against the building wall. All modern domestic refrigerating units are air cooled and provision must be made for ample air circulation through the unit compartment. In the conventional domestic refrigerator this is usually accomplished by setting the refrigerator on legs and at a little distance from the wall and adjoining cabinets. In the Murphy Cabranette all air is supplied and exhausted through the grille at the front.

Hermetically Sealed Refrigerating Unit

Murphy Cabranette refrigerating unit (50 or 60 cycle alternating current) is hermetically sealed, simple and rugged to give lifetime service with no attention whatever. Nothing to oil, no belt to replace. Mechanism sealed in welded steel housing. Refrigerant is Freon, a harmless non-toxic, non-corrosive gas.

Servicing is easy should it ever be necessary. Entire refrigerating unit may be withdrawn without disconnecting anything. The unit can actually be operated while out on the kitchen floor.

(For D.C. and odd frequency A.C., refrigerating unit is conventional open belted type. Not arranged to be withdrawn from compartment.)

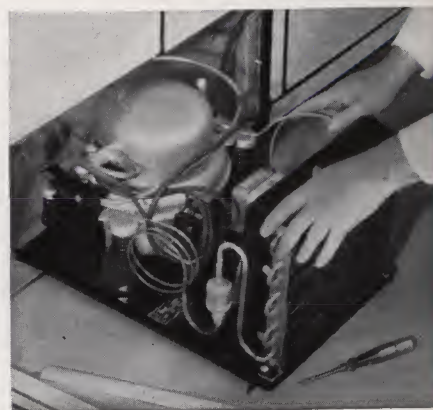

Shipped Completely Assembled

Both types of refrigerator are shipped with refrigerating unit installed and connected. Putting the hermetic unit into service is just a matter of plugging the cord into the wall receptacle.

TYPE LR Murphy Cabranette Refrigerator





MURPHY

Series 81

Here are four sizes of built-in kitchen that are designed for the built-in home. They also justify a somewhat higher price where greater capacity is required and where space is

Refrigerator

Refrigerator food storage space is of substantial height, with a defrosting mechanism in the back. The door is on other side of unit. The wall case immediately above refrigerator is deep enough to hold trays and large dishes. This is a desirable unit—the refrigerator is located under the counter (see illustration to the

Gas or Electric

The range (gas or electric) is of large capacity, with large

oven and separate broiler compartment. The base units, including range and oven, are set-back base to provide toe space.

Stock colors are white or ivory. Other color combinations on special order.

Sinks are made with right or left hand order that exact reverse of a standard is available when kitchen is built back to back.

This illustration shows Murphy Cabranette Kitchen No. 81, Assembly No. 3. Nos. 84, 87 and 90 are identical in appearance but with variations in size of refrigerators, sinks and storage cabinets.

Refer to other side of this sheet for details on space requirements when kitchen is built between walls. Detailed roughing-in drawings will be furnished upon request.

MURPHY CABRANETTE Kitchen

1 to 90

in the finest apart-
money can buy—
ilding where rent—
hat higher cost—
acity is required
available.

Refrigerator


space is at conven-
th refrigerating
base (see descrip-
of this sheet). The
ely above the re-
nough for storage
utensils. A very
utility drawer base
e sink drainboard
e right).

Electric Range

electric) is ample
ge, fully insulated
ompartments. All
l refrigerator, have
pace.


y with black trim.
pecial order.

left drainboard in
rrangement illus-
ens are installed

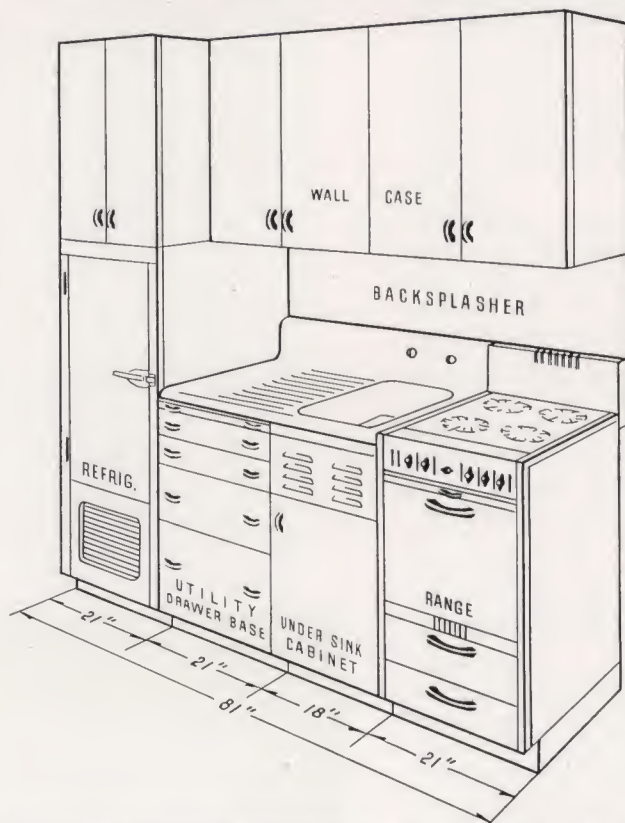


MURPHY CABRANETTE KITCHEN NO. 81 — ASSEMBLY NO. 3

REFRIGERATOR	RANGE	SINK	WALL CASES
Gross Content 5.57 cu. ft.	LG 3621 Gas	23" x 39"	Content 19.2 cu. ft.
Shelf Area 7.34 sq. ft.	or	Porcelain	Shelf Area 24.3 sq. ft.
63 Ice Cubes	6¾lbs. in 3 Trays	LE 3621 Elec.	Cast Iron

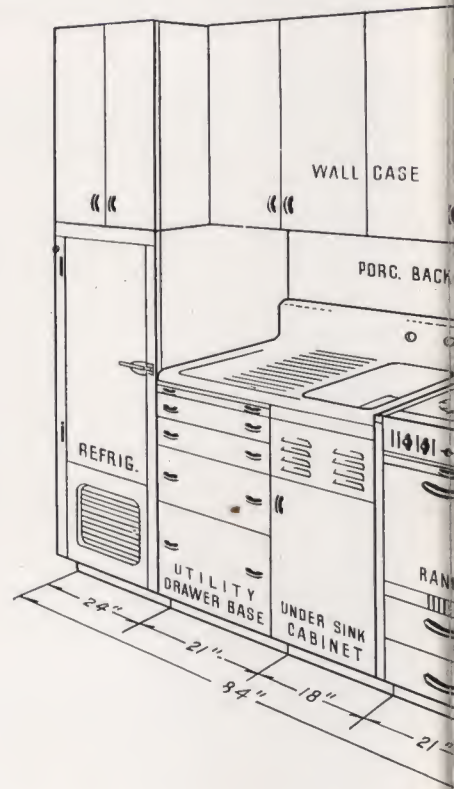


MURPHY CABRANETTE KITCHEN NO. 84 —

REFRIGERATOR	RANGE	SINK
Gross Content 6.66 cu. ft.	LG 3621 Gas	23" x 39"
Shelf Area 9.32 sq. ft.	or	Porcelain
63 Ice Cubes	6¾lbs. in 3 Trays	LE 3621 Elec.

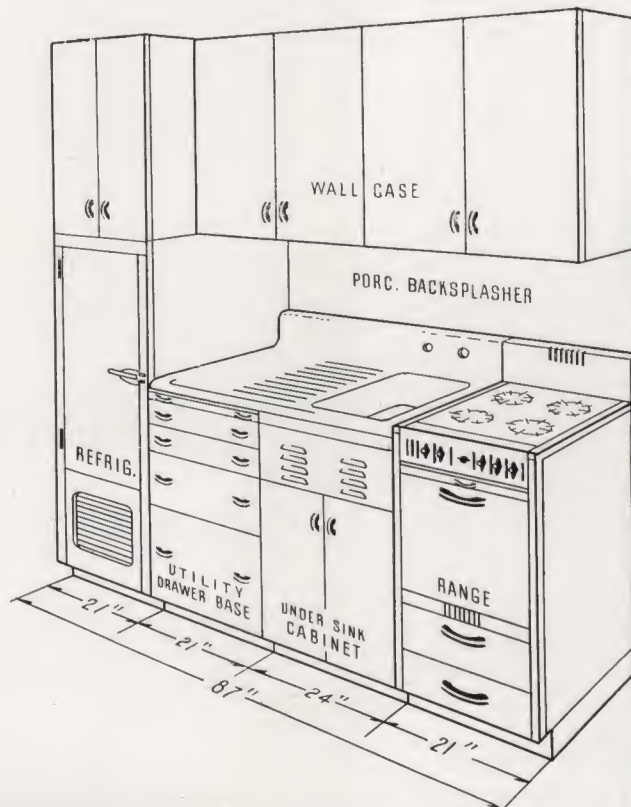

MURPHY CABRANETTE KITCHEN NO. 87 — ASSEMBLY NO. 3

REFRIGERATOR	RANGE	SINK	WALL CASES
Gross Content 5.57 cu. ft.	LG 3621 Gas	23" x 45"	Content 20.4 cu. ft.
Shelf Area 7.34 sq. ft.	or	Porcelain	Shelf Area 25.8 sq. ft.
63 Ice Cubes	6¾lbs. in 3 Trays	LE 3621 Elec.	Cast Iron

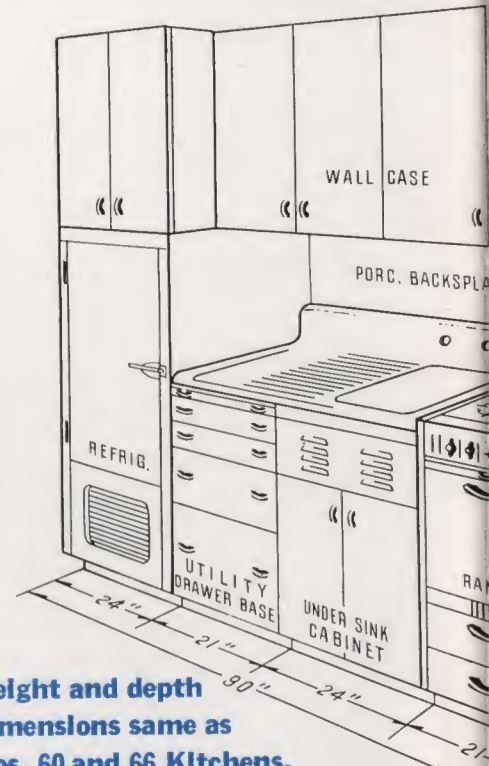


MURPHY CABRANETTE KITCHEN NO. 90

REFRIGERATOR	RANGE	SINK
Gross Content 6.66 cu. ft.	LG 3621 Gas	23" x 39"
Shelf Area 9.32 sq. ft.	or	Porcelain
63 Ice Cubes	6¾lbs. in 3 Trays	LE 3621 Elec.


Height and depth
dimensions same as
Nos. 60 and 66 Kitchens.
See drawings below.

ens

Every MURPHY CABRANETTE is Built of Steel—With Entire Front in Vitreous Porcelain

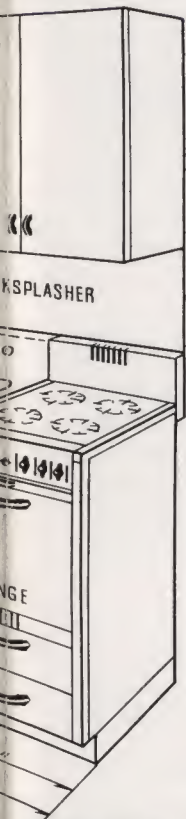

— ASSEMBLY NO. 3
WALL CASES
39" Content 20.4 cu. ft.
Main Shelf Area 25.6 sq. ft.
Iron

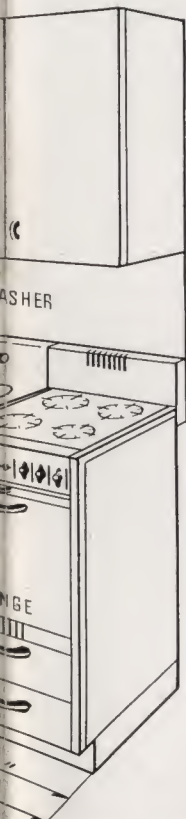


— ASSEMBLY NO. 3
WALL CASES
45" Content 21.5 cu. ft.
Main Shelf Area 27 sq. ft.
Iron



Sinks on MURPHY CABRANETTES

Murphy Cabranette sinks are porcelain on cast iron, made from our own patterns for Murphy Cabranette Kitchens exclusively. Note generous size of bowl and exceptional depth. Bowl on both 39" and 45" sinks is 15½ x 19", and depth (from top of drainboard) is 8".

Drain outlet is 3½" diameter, designed to receive basket type strainer, which catches crumbs, and is provided with valve so that water may be held in sink bowl if desired. Strainer is accessory equipment, separately priced.

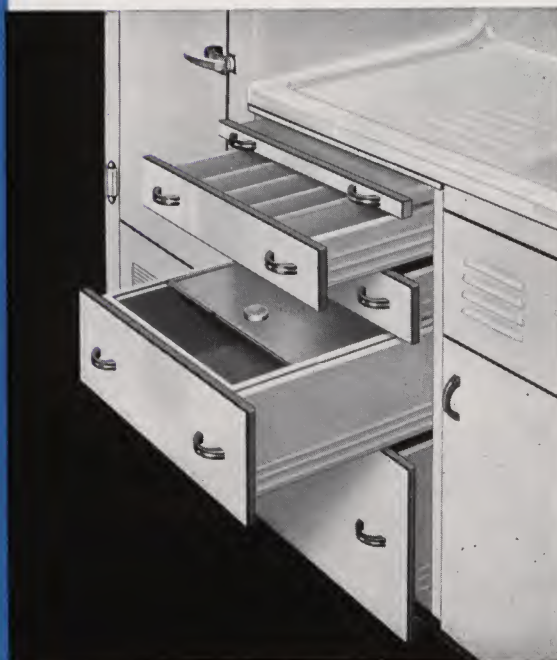

Undersink Cabinets on Series 81 to 90 Kitchens

Two undersink arrangements may be had on all kitchens in this series. Arrangement shown in complete kitchen assembly consists of 21" Utility Drawer Base with separate undersink cabinet under bowl section of sink. The other arrangement uses Type "D" Undersink Cabinet, a one-piece unit extending full length of sink.

Utility Drawer Base (above at left) has cutting board of heavy hardwood with metal slides. Top drawer is linoleum lined, equipped with adjustable partitions for cutlery. Smaller of the two large drawers has removable tin bread or cake box with sliding cover. Large lower drawer for utensils.

Type "D" Undersink Cabinet (above at right) has one large drawer, fitted with removable sliding wooden cutting board, removable tin bread or cake box and removable cutlery tray. Cupboard compartment below, which extends full length of cabinet, is fitted with an adjustable shelf.

Every MURPHY CABRANETTE is

MURPHY CABRANETTE Kitchen No. 60 and No. 66

These are the most popular assemblies in the entire line. They include every modern kitchen necessity in the least possible space. A full sized fully insulated range (gas or electric) with cooking capacity equal to that of the range found in the average home—ample refrigeration and storage space—all in a compact perfectly matched unit.

The wall case (with hollow back) screws to 1" x 4" wood bucks attached to the building wall. The flat porcelain back-splasher screws directly to the building wall. The sink back and range back rail fit snugly against the backsplasher. Standard wall case equipment includes six spice jars in rattle proof racks mounted on inside of doors, also wood cutting board on slides attached to shelf. A cutlery drawer is attached to the bottom of the wall case.

Refrigerator

The refrigerator is located under the sink drainboard and the mechanism is in the lower section of the undersink cabinet (covered by the grille). The upper section of the undersink cabinet is available for storage and is entirely separate from the mechanism compartment. The shelf which separates these compartments is removable for access to the refrigerating unit, as is also the grille at the front.

Stock colors are white or ivory with black trim. Other color combinations on special order.

Note that toe space is provided on every unit of the base assembly.





This illustration shows Murphy Cabranette Kitchen No. 60, Assembly No. 1. No. 66 is identical in appearance but has larger refrigerator, more storage space as well as a sink with longer drainboard.

Available with refrigerator on left and range on right as illustrated, or with these pieces reversed and using sink with drainboard on opposite side.



See other side of this sheet for details on space requirements when kitchen is to be built between walls. Detailed roughing-in drawings will be furnished on request.

s built of Steel—with entire front

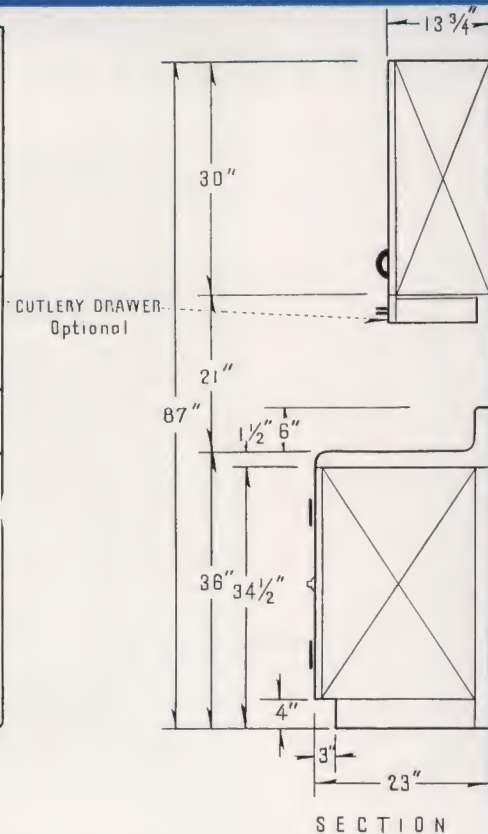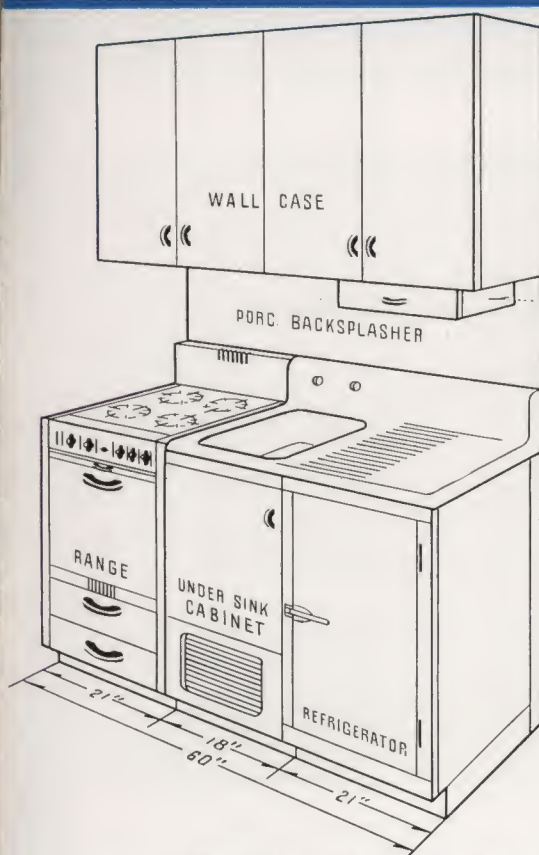

MURPHY CABRANETTE KITCHEN NO. 60 — ASSEMBLY NO. 1

REFRIGERATOR	RANGE	SINK	WALL CASE
Gross Content 4.22 cu. ft.	LG 3621 Gas	23" x 39" Porc.	Content 12 cu. ft.
Shelf Area 7.42 sq. ft.	or	Cast Iron	Shelf Area 15 sq. ft.
42 Ice Cubes	LE 3621 Elec.		

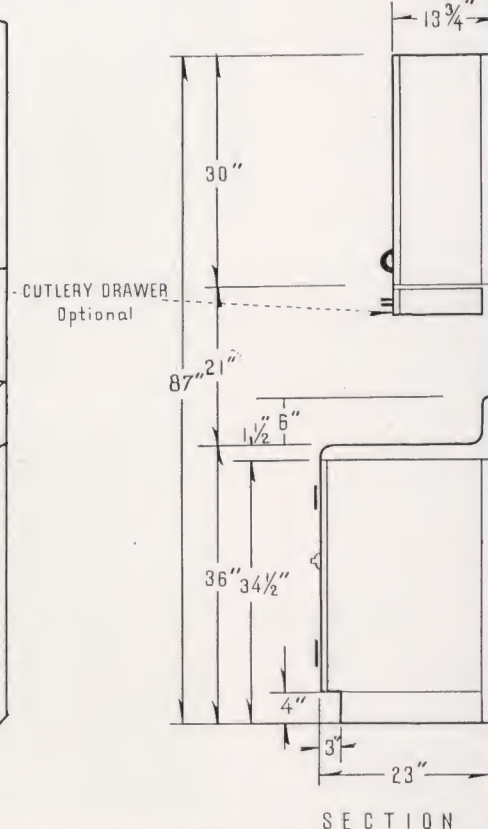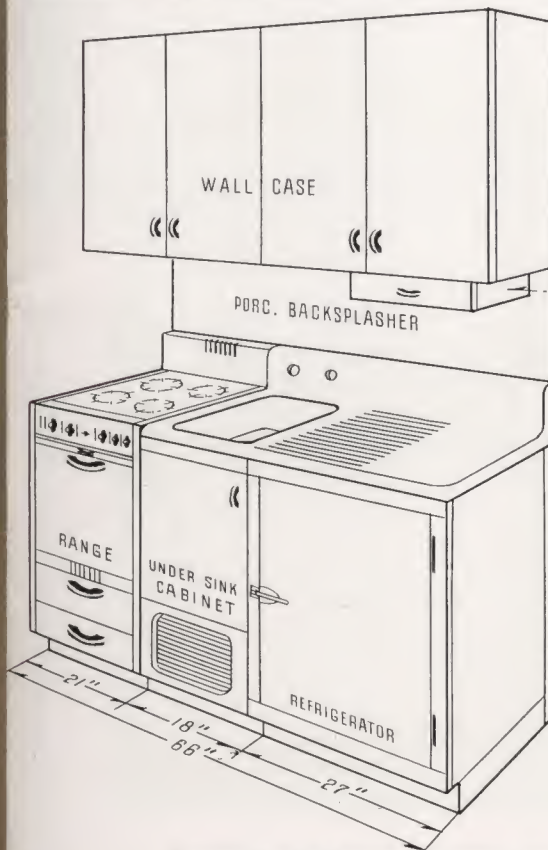

MURPHY CABRANETTE KITCHEN NO. 66 — ASSEMBLY NO. 1

REFRIGERATOR	RANGE	SINK	WALL CASE
Gross Content 5.76 cu. ft.	LG 3621 Gas	23" x 45" Porc.	Content 13 cu. ft.
Shelf Area 9.46 sq. ft.	or	Cast Iron	Shelf Area 16.5 sq. ft.
3 Ice Cubes	LE 3621 Elec.		



in Genuine Vitreous Porcelain

Companion Ranges—Gas and Electric

At the left is model LG 3621 Murphy Cabranette gas range—a product of years of experience in the design of ranges intended for installation between cabinets. Although this range is but 21" wide, the actual cooking capacity compares favorably with that of any domestic range. The oven is 17" wide, 18" deep, and 12" high. Broiler compartment (immediately below oven) is same width and depth and 4" high. The utensil drawer at the bottom extends clear down into sub-base in order to make use of all available space. There are four top burners which light automatically when the gas is turned on. Cooking top is black porcelain, with depressed bowls encircling modern round cast iron burners. Individual cast iron grates are finished in black porcelain. Fully insulated oven and broiler compartments, all porcelain lined.

Entire front is finished in porcelain—sides are finished in black heat resisting paint. When side of range is exposed in the room, porcelain side panel will be supplied if so ordered at additional cost. Optional accessory equipment, at additional cost, includes oven heat control and one piece hinged porcelain cooking top cover.



Model LE 3621 Electric Range

Companion to the gas range—in the same overall dimensions and practically the same in appearance. Oven and broiler compartments exactly the same as gas range except depth, which is 1" less. Porcelain cooking top, finished in color to match cabinets. Equipped with three top burners—one 2000 watt, one 1200 watt and one 1000 watt. Open burners are standard equipment, but "Chromalox" closed burners for either or all burners will be supplied at additional cost.

Combination oven and broiler burner of 3500 watts capacity, making total connected load 7700 watts. Switches are the very latest load balancing type with high, medium, low and off positions. Automatic oven heat control is standard equipment on the electric range.

Range sides are finished in black heat resisting paint, but porcelain side panel (for right or left side) will be supplied at additional cost when so ordered.

Broom and Linen Closets

Broom or linen closets may be added at either or both ends of any of the kitchens shown on this page. In the broom closet, broom and cleaning utensil storage space is provided in the lower compartment. The upper compartment is fitted with one adjustable shelf.

The upper compartment of the linen closet is the same as the broom closet, but the lower compartment is fitted with four adjustable shelves.

Broom and linen closets are built in the same range of sizes and in exactly the same dimensions. The height of all sizes is 87". Each size is available in a depth dimension of 13¾" (matching the depth of the wall case) and 23" (matching the depth of the base cabinets). Made in 12", 15", 18", 21" and 24" widths. 12" to 18" inclusive have one lower and one upper door. 21" and 24" have two lower and two upper doors.





Installing MURPHY CAB

Building the Recess


The recess must be accurately constructed to the dimensions specified. Walls must be straight and true, and at exact right angles to each other. To guard against excess or uneven plaster coat, it is well to provide the plasterer with a board cut to the exact width of the recess and require that this board fit snugly between the walls at any point.

The minimum recess depth for either treatment "A" or "B" is 24".

Treatment "A" recess width is kitchen width plus $\frac{1}{2}$ ".

Treatment "B" recess width is kitchen width plus $2\frac{1}{2}$ ".

Furring the Ceiling to Top of Cabinets

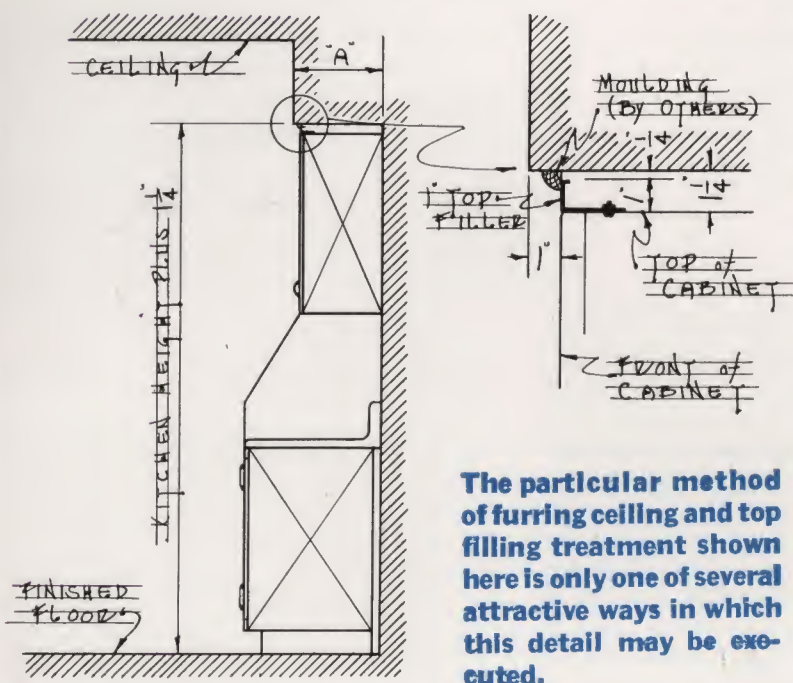


When the ceiling is furred down, a porcelain top filler is necessary. This filler screws to the top of the wall case and must be attached before the wall case is hung. A separate filler is required for each wall case or cabinet (such as broom closet) in the assembly.

Dimension "A" (minimum) is wall case or cabinet depth plus 1". For the standard wall case, therefore, this dimension becomes $13\frac{3}{4}$ plus 1" or $14\frac{3}{4}$ ". Where both shallow and deep wall cases are used in one assembly (such as series 81 to 90 kitchens), we recommend that furring be continuous at the deeper cabinet depth.

Note that width dimension provides for only $\frac{1}{4}$ " clearance between furred ceiling and cabinet top. This clearance dimension may be increased if desired by using heavier moulding. The width dimension should be carefully checked by a plasterer in the manner described above for recess construction.

The moulding is not a part of the kitchen and should be specified under another contract.


—All Steel—With Entire Front in Genuine Vitreous Porcelain

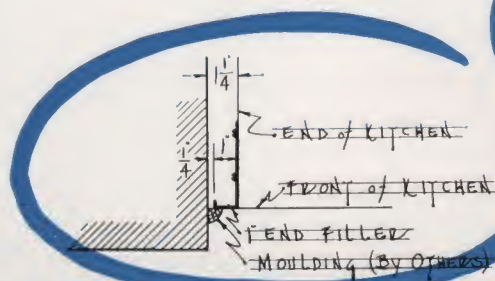

BRANETTE kitchens in recess or between walls



**Treatment
"A"**

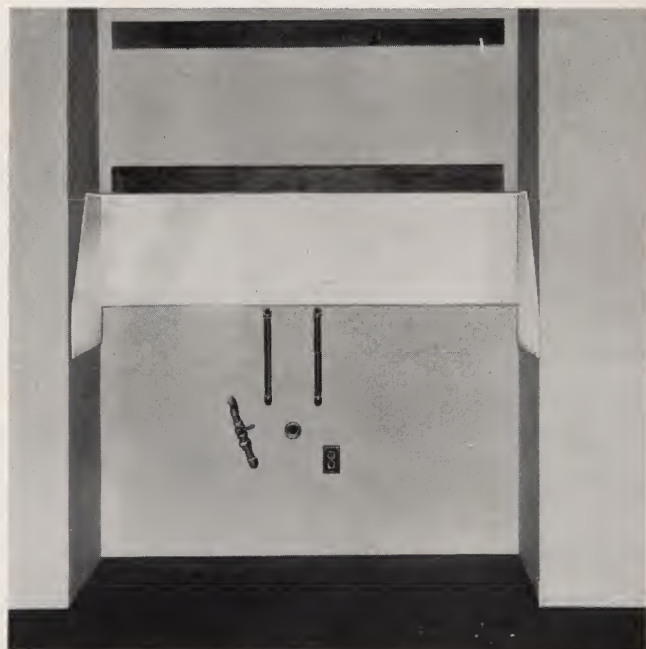


for snug fit between walls—without fillers and with flat porcelain end splashers. This treatment is recommended where space is limited and where recess walls are of fireproof construction. Width of recess is kitchen width plus $\frac{1}{2}$ ". Minimum recess depth is 24".

Treatment "A" recess (upper right) is shown ready for installation of kitchen. The flat porcelain backplasher (same width as recess) is screwed directly

to the back wall of the recess. Flat porcelain end splashers are then butted tightly against the backplasher and screwed to the end walls.

Two 1" x 4" boards are attached to the rear wall to provide support for the wall case. The wall case is screwed to these boards through the back panel, which is recessed.

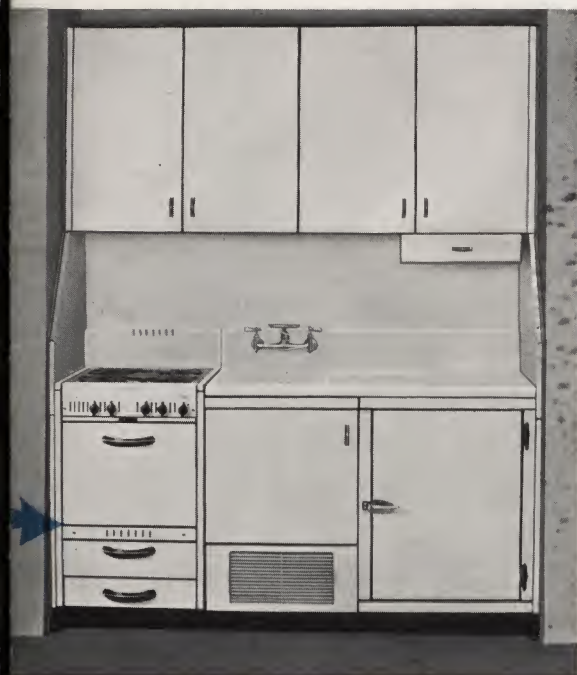

**Treatment
"B"**

installation with $1\frac{1}{4}$ " air space between kitchen and recess wall at each end. Recommended when recess walls are not fireproof. The porcelain backplasher (which is $\frac{1}{2}$ " longer than kitchen proper) is flat and screws directly to the rear wall of the recess. A porcelain end filler with 1" flange is required for each end of the base assembly and each end of the wall case. Width of recess is kitchen width plus $2\frac{1}{2}$ ". Minimum recess depth is 24". The moulding is not a part of the kitchen and should be specified under another contract.



Treatment "B" recess ready for installation of kitchen. The flat porcelain backplasher is screwed to the rear wall of the recess and 1" x 4" wood boards for attaching wall case are in place.

Note that end splashers and end fillers are attached to the equipment rather than the recess walls.

BRANETTE kitchens in recess or between walls

Digitized by:



ASSOCIATION FOR PRESERVATION TECHNOLOGY

www.apti.org

For the

BUILDING TECHNOLOGY HERITAGE LIBRARY

<https://archive.org/details/buildingtechnologyheritagelibrary>

From the collection of:



SOUTHEASTERN ARCHITECTURAL ARCHIVE
SPECIAL COLLECTIONS
HOWARD-TILTON MEMORIAL LIBRARY

<http://seaa.tulane.edu>

Installation with 1 1/4" air space between kitchen and recess wall at each end. Recommended when recess walls are not fireproof. The porcelain back-splasher (which is 1/2" longer than kitchen proper) is flat and screws directly to the rear wall of the recess. A porcelain end filler with 1" flange is required for each end of the base assembly and each end of the wall case. Width of recess is kitchen width plus 2 1/2". Minimum recess depth is 24." The moulding is not a part of the kitchen and should be specified under another contract.

Treatment "B" recess ready for installation of kitchen. The flat porcelain back-splasher is screwed to the rear wall of the recess and 1" x 4" wood boards for attaching wall case are in place.

Note that end splashers and end fillers are attached to the equipment rather than the recess walls.